


Nombre : DME N° 07
 Progresiva : Km. 19+860
 Lado : Izquierdo
 Acceso : 150 m
 Area : 51179.65 m²
 Perimetro : 957.01 m
 Ubicación :
 Distrito : Campanilla
 Caserío : Huingullo

COORDENADAS UTM (POLIGONAL)
 DATUM: WGS 84 - Zona 18

VERTICE	LADO	DISTANCIA (m)	COORDENADAS UTM (E, N)
1	1-2	94.59	312594.7178 9191146.733
2	2-3	199.08	312620.2414 9191234.389
3	3-4	26.17	312818.9 9191221.482
4	4-5	74.48	312839.5509 9191237.55
5	5-6	213.74	312906.4047 9191204.711
6	6-7	156.8	312896.1602 9190991.214
7	7-1	192.15	312750.9291 9191050.317

Sección	Longitud	Area	Estado
@ 0	20	1454.37	29,087.40
@ 20	20	1572.02	31,440.40
@ 40	20	1584.95	31,699.00
@ 60	20	1605.71	32,114.20
@ 80	20	1452.83	29,056.60
@ 100	20	1039.35	20,787.00
@ 120	20	695.43	13,908.60
@ 140	20	403.58	8,071.60
@ 160	15	167.17	2,507.55
@ 20	20	1321.08	26,421.60
@ 40	20	1205.42	24,108.40
@ 60	20	1088.37	21,767.40
@ 80	20	978.21	19,964.20
@ 100	20	876.42	17,528.40
@ 120	20	779.72	15,594.40
@ 140	20	581.85	11,637.00
Total			335,293.75

Metrica	Unid	Cantidad
Revegetación	m ²	49406.09
Retiro de cobertura vegetal	m ²	48047.11

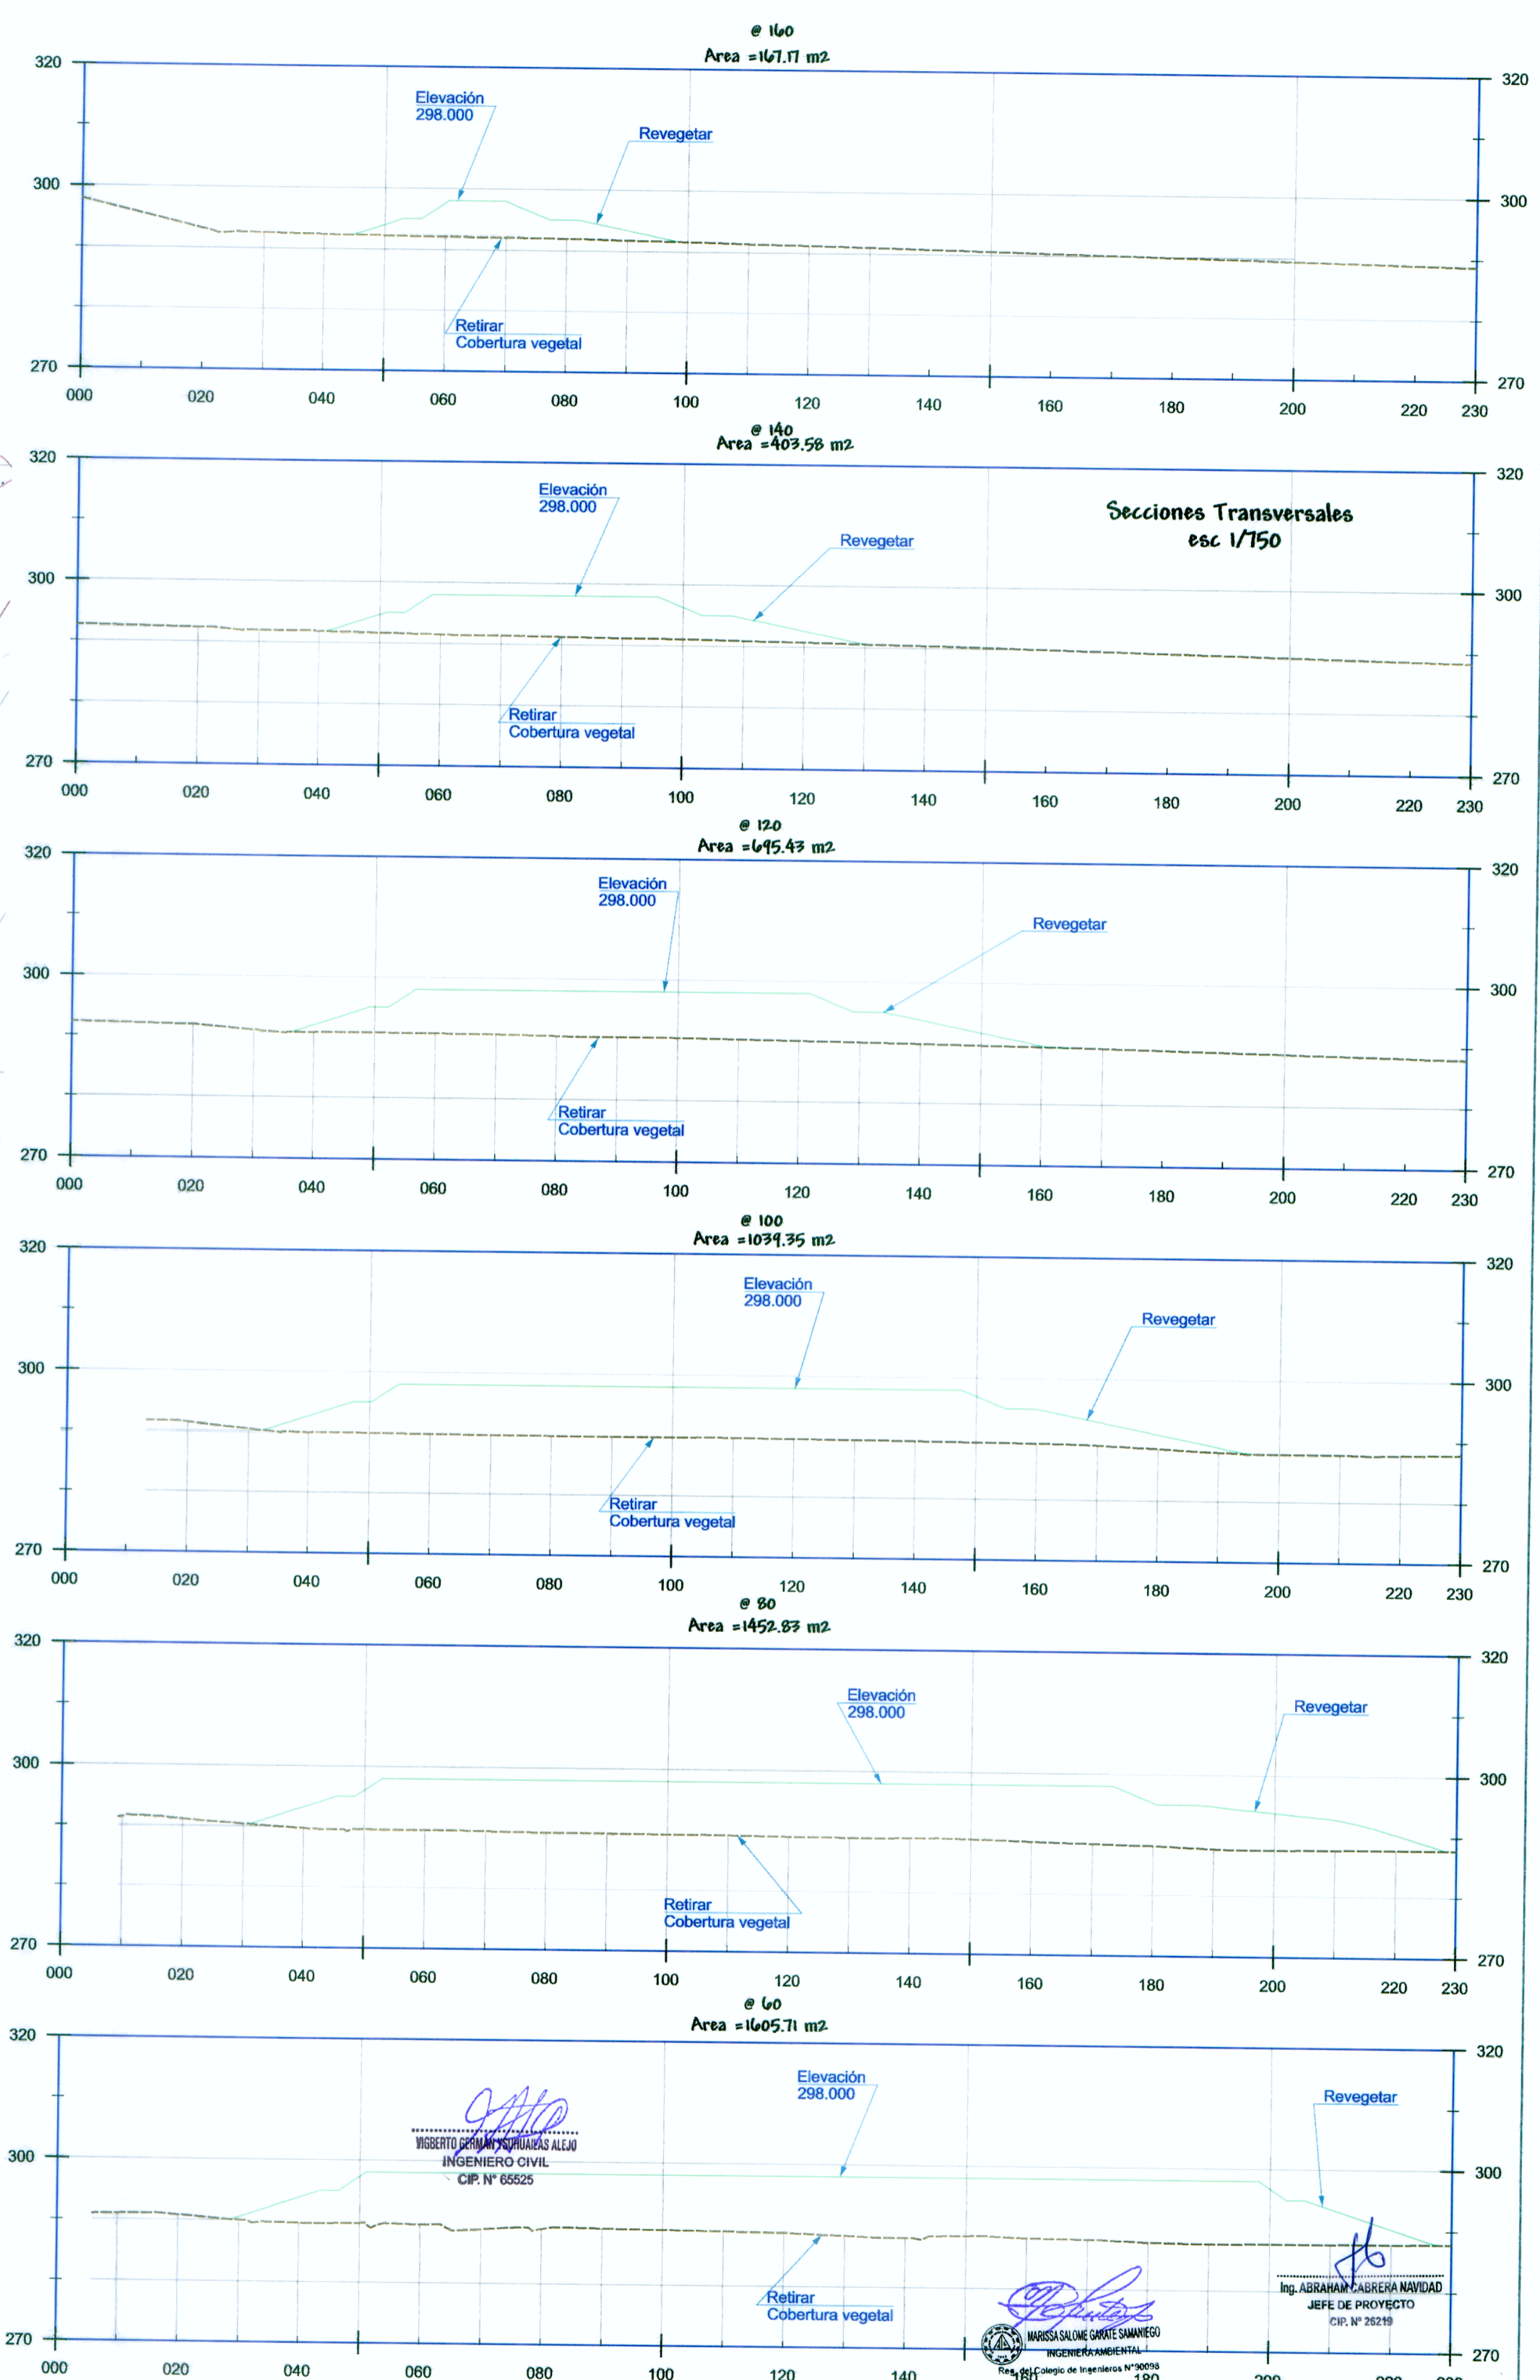

[Signature]
 INGENIERO CIVIL
 CIP. N° 65525

[Signature]
 ING. ABRAM CABRERA NAVARRA
 JEFE DE PROYECTO
 CIP. N° 28219